

# True Presence

BT IPD - concealed  
 EAN 4007841 064518  
 Article number 064518



Hochfrequenz Sensor  
360°



Bewegung Ø 15 m



Präsenz Ø 15 m



True Presence Ø 9 m



Helligkeit



2 - 12 m



IP20

5 years

Herstellergarantie  
 steinel-professional.de/  
 garantie



CE

## Function description

The world's first true presence detector! No unnecessary stay-ON times any more – no unnecessary electricity costs. Precision high-frequency measurement of the surrounding area provides 100 per-cent reliable detection. The True Presence detector reliably identifies whether persons are present or absent over an area of 64 m<sup>2</sup> – on the basis of the body's micro movements as well as human vital functions, such as breathing in and out, or shoulder movement. The new standard in building automation. Easy to control via app and Bluetooth.

## Technical specifications

Dimensions (L x W x H)	50 x 103 x 103 mm	Optimum mounting height	2,8 m
With motion detector	Yes	Montagehöhe max. True Presence Erfassung	4,00 m
Manufacturer's Warranty	5 years	HF-system	7,2 GHz
Settings via	Bluetooth	Detection	also through glass, wood and stud walls
With remote control	No	Detection angle	360 °
Version	BT IPD - concealed	Angle of aperture	160 °
PU1, EAN	4007841064518	Sneak-by guard	Yes
Type	Presence detector	Capability of masking out individual segments	No
Application, place	Indoors	Electronic scalability	Yes
Application, room	classroom, lecture hall, one-person office, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, hotel room, care room, duty room, recreation room, dining hall / staff restaurant, changing room, kitchenette, sports hall, reception / lobby, WC / washroom, warehouse, Indoors	Mechanical scalability	No
		Reach, radial	Ø 15 m (177 m <sup>2</sup> )
		Reach, tangential	Ø 15 m (177 m <sup>2</sup> )
		Reach, presence	Ø 15 m (177 m <sup>2</sup> )
		True Presence reach	Ø 9 m (64 m <sup>2</sup> )

# True Presence

BT IPD - concealed  
 EAN 4007841 064518  
 Article number 064518




## Technical specifications

Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Technology, sensors	High frequency, Light sensor
Mounting height	2,00 – 12,00 m
Mounting height max.	12,00 m

Transmitter power	< 1 mW
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	Bluetooth

## Detection Zone

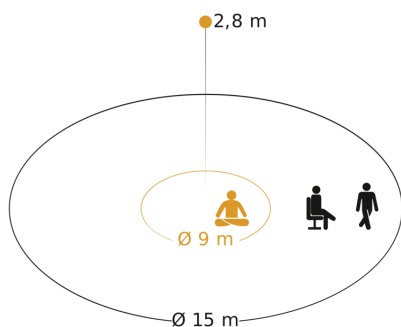

Possible mounting height: 2,00 m – 12,00 m  
 Orange: True Presence  
 Black: movement and presence

## Circuit diagram

