

True Presence

COM1 - concealed black
 EAN 4007841 068509
 Article number 068509



Hochfrequenz
Sensor 360°



Bewegung Ø 15 m



Präsenz Ø 15 m



True Presence Ø 9
m

2000 W

2000 W Max. (LED-
fähig)



2 - 12 m



20 Sek - 60 Min



IP20

5 years

Herstellergarantie
steinel-
professional.de/
garantie



CE

Function description

The world's first true presence detector! No unnecessary stay-ON times any more – no unnecessary electricity costs. Precision high-frequency measurement of the surrounding area provides 100 per-cent reliable detection. The True Presence detector reliably identifies whether persons are present or absent over an area of 64 m² – on the basis of the body's micro movements as well as human vital functions, such as breathing in and out, or shoulder movement. The new standard in building automation. Easy to control via app and Bluetooth. Light measurement is not possible with the black sensors. An external light meter must be integrated via Bluetooth or KNX for this purpose.

Technical specifications

Dimensions (L x W x H)	50 x 103 x 103 mm	Mounting height	2,00 – 12,00 m
With motion detector	Yes	Mounting height max.	12,00 m
Manufacturer's Warranty	5 years	Optimum mounting height	2,8 m
Settings via	Bluetooth	Montagehöhe max. True Presence Erfassung	4,00 m
With remote control	No	HF-system	7,2 GHz
Version	COM1 - concealed black	Detection	also through glass, wood and stud walls
PU1, EAN	4007841068509	Detection angle	360 °
Type	Presence detector	Angle of aperture	160 °
Application, place	Indoors	Sneak-by guard	Yes
Application, room	classroom, lecture hall, one-person office, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, hotel room, care room, duty room, recreation room, dining hall / staff restaurant, changing room, kitchenette, sports hall, reception / lobby, WC / washroom, warehouse, Indoors	Capability of masking out individual segments	No
		Electronic scalability	Yes
		Mechanical scalability	No
		Reach, radial	Ø 15 m (177 m ²)

True Presence

COM1 - concealed black
 EAN 4007841 068509
 Article number 068509



Technical specifications


Colour	black
Colour, RAL	9005
Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	2000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Switching output 1, floating	No
Switching output 1, low-voltage halogen lamps	2000 VA
Power consumption	1 W
Technology, sensors	High frequency, Light sensor

Reach, tangential	Ø 15 m (177 m ²)
Reach, presence	Ø 15 m (177 m ²)
True Presence reach	Ø 9 m (64 m ²)
Transmitter power	< 1 mW
Time setting	20 s – 60 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth

True Presence


COM1 - concealed black
EAN 4007841 068509
Article number 068509

Detection Zone

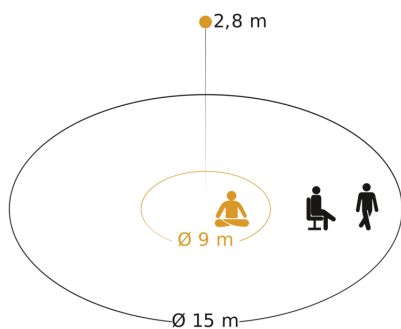

Possible mounting height: 2,00 m - 12,00 m
Orange: True Presence
Black: movement and presence

Dimension Drawing

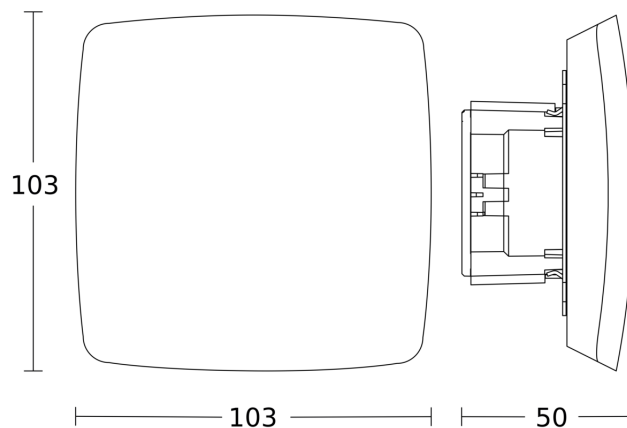

Master circuit diagram

