

Indoor light without sensor - Professional Line

RS PRO 5150 C


without motion detector
EAN 4007841 058722
Article number 058722



LED



4000 K



36 Jahre (Ø 4,5 Std / Tag)

Bluetooth

4000K neutralweiß

Innenleuchte

Ideal max. 3,5 m

0 - 100% Grundlicht

0 - 100% Hauptlicht

Vernetzbar via Bluetooth

Lichtquelle nicht austauschbar

Betriebsgerät nicht austauschbar

Function description

Perfect for renovation. Our engineers agreed: The new moisture-proof luminaire should be simple and good. Easy to install and maintain, good in energy efficiency, function and quality. The result: RS PRO 5100 C. The moisture-proof luminaire the world has been waiting for. Robust, highly functional, child's play to install, wireless to network and ultimately convenient to adjust via smartphone.

Technical specifications

Dimensions (L x W x H)	1500 x 87 x 58 mm	Twilight setting	2 – 2000 lx
With motion detector	No	Time setting	5 s – 60 Min.
Manufacturer's Warranty	5 years	Basic light level function	Yes
Version	without motion detector	Basic light level function time	1-60 min
PU1, EAN	4007841058722	Main light adjustable	0 - 100 %
Colour	grey	Interconnection	Yes
Installation site	wall, ceiling	Interconnection via	Bluetooth Mesh Connect
Installation	Ceiling	Lifetime LED according to IEC-62717 (L70)	100.000 h
Impact resistance	IK07	Lifetime LED according to IEC-62717 (L80)	68.000 h
IP-rating	IP65	Lebensdauer LED nach IES TM-21 (L70)	> 60.000 h
Protection class	II	Lifetime LED according to IES TM-21 (L80)	> 60.000 h
Ambient temperature	-20 – 40 °C	Fuse protection B10	41
Housing material	Plastic	Fuse protection B16	65
Cover material	Plastic, structured	Fuse protection C10	67
Mains power supply	220 – 240 V / 50 – 60 Hz	Fuse protection C16	108
Power consumption	0,45 W		
Mounting height max.	3,50 m		

<https://www.steinel.de>

Subject to technical modifications

04.2024 Page 1 from 2

RS PRO 5150 C

without motion detector
 EAN 4007841 058722
 Article number 058722




Technical specifications

Electronic scalability	Yes
Luminous flux total product	5940 lm
Colour temperature	4000 K
Lamp	LED cannot be replaced
Functions	Encrypted communication, Orientation light, Neighbouring group function, Light sensor, Free selection of the light value in a luminaire group, Adjustable fade time when switching on and off, Motions sensor, Connection to central battery systems

Basic light level function in per cent	0 – 100 %
Output	42 W
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	14,8 A
Angle of aperture	160 °
Detection angle	360 °

Dimension Drawing

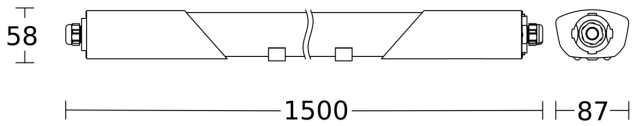

Circuit diagram 1

