

RS PRO P2 flat S

Neutral white
EAN 4007841 069735
Article number 069735



LED

36 Jahre (Ø 4,5 Std / Tag)



Innenleuchte



Hochfrequenz
Sensor 360°



Max. 8 m



2 - 2000 Lux



Vernetzbar via Kabel



Manuelle
Übersteuerung 4
Std



Lichtquelle nicht austauschbar



Betriebsgerät nicht austauschbar



IP54

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect switched indoor light. The RS PRO P2 flat S integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and unbeatable efficiency. High-precision 360° HF sensor for reliable detection (8 m reach). In addition, two metal discs are always included to further limit the sensor in certain directions. As many as ten lights can be interconnected by cable. Output: 15,4 W with 1700 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	322 x 68 mm	Soft light start	Yes
With lamp	Yes, STEINEL LED system	Twilight setting	2 – 2000 lx
With motion detector	Yes	Time setting	5 s – 15 Min.
Manufacturer's Warranty	5 years	Basic light level function	Yes
Version	Neutral white	Basic light level function time	10/30 min, all night
PU1, EAN	4007841069735	Main light adjustable	No
Colour	white	Interconnection	Yes
Installation site	wall, ceiling	Interconnection via	Cable
Installation	Ceiling	Lifetime LED according to IEC-62717 (L70)	100.000 h
Impact resistance	IK03	Lifetime LED according to IEC-62717 (L80)	73.000 h
IP-rating	IP54	Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Protection class	II	Lifetime LED according to IES TM-21 (L80)	>60.000 h
Ambient temperature	-10 – 40 °C	Fuse protection B10	54
Housing material	Plastic	Fuse protection B16	87
Cover material	Plastic, opal		
Mains power supply	220 – 240 V / 50 – 60 Hz		

RS PRO P2 flat S

Neutral white
EAN 4007841 069735
Article number 069735



Technical specifications


Mounting height max.	4,00 m
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 8 m (50 m ²)
Luminous flux total product	1700 lm
Total product efficiency	110 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control

Fuse protection C10	90
Fuse protection C16	145
Switching output 1, low-voltage halogen lamps	800 VA
LED lamps > 8 W	250 W
Capacitive load in µF	88 µF
Basic light level function in per cent	10 %
Output	15,4 W
Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
IP-rating, ceiling	IP54
Detection angle	360 °

RS PRO P2 flat S


Neutral white
EAN 4007841 069735
Article number 069735

Detection Zone

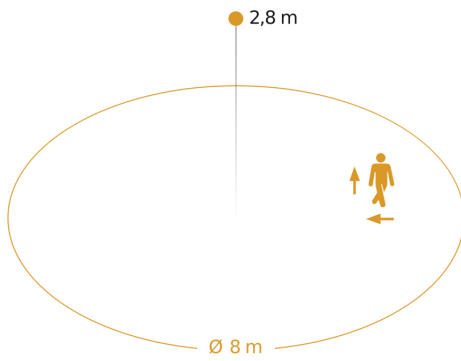


Possible mounting height: 2,00 m - 4,00 m
Orange: radial and tangential

Dimension Drawing

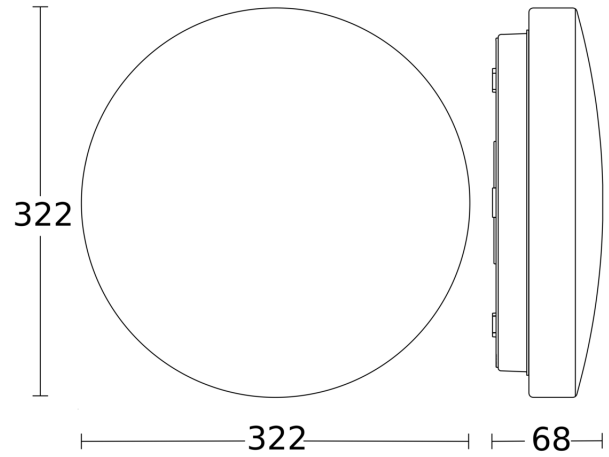


Light Distribution Curve



Output	15,4 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1700 lm
Colour temperature	4000 K
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Master circuit diagram




RS PRO P2 flat S

Neutral white
EAN 4007841 069735
Article number 069735



Master/master interconnection circuit diagram

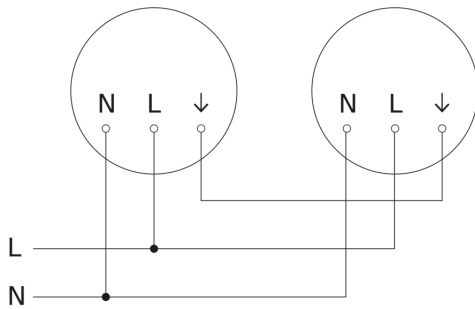

Master/slave interconnection circuit diagram

