


Data sheet

SENSOTEC Sensor IPD


HF2 IPD

110088252

SENSOTEC Sensor HF2 IPD



The HF2 IPD is a high frequency sensor module designed for built-in applications. Capable of detecting movement through glass and non-metallic materials, these modules can be installed without a problem inside luminaires or other applications.

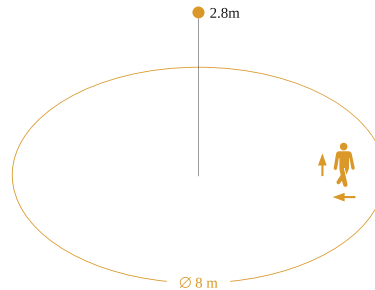

Technical specifications

GTIN	4007841085476
Type	9025
Dimensions	52 × 40.5 × 29.2mm Hole spacing 61mm
3D data	available online
DALI instances	Occupancy sensor (type 3) / Light sensor (type 4)
Sensor technology	High-frequency technology
Transmitter power	1 - 2mW
Transmission frequency	5,8GHz
Light measurement range	4 - 1000lx
Angle of coverage	360° with 160° angle of aperture
Mounting height	2.5 - 3.5m
Optimum mounting height	2.8m
Reach, radial	Ø 8m (50m ²) for mounting height 2.8m
Reach, tangential	Ø 8m (50m ²) for mounting height 2.8m
Connection	0.34 - 0.75mm ²
Supply voltage / current consumption	12 - 22.5VDC / max. 36mA
IP rating	IP20
Temperature range	-20 to +60°C (tc +60°C)
Interfaces	DALI
Approval marks / Conformity	CE / DALI-2
Standards	EN 61347-1 / EN 61347-2-11 / EN 55015 / EN 61547 / EN 62386-101 / EN 62386-103 / EN 62386-303 / EN 62386-304

Note: STEINEL Solutions AG hereby declares that the SENSOTEC IPD products comply with Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available at the following link: <https://bit.ly/3Ph2WYL>

Downloads & further details

[Data sheet SENSOTEC IPD](#)

[3D data](#)

[EU Declaration of Conformity](#)