

LED outdoor light without sensor

L 40 C

without motion detector, with Bluetooth
EAN 4007841 085230
Article number 085230



LED

30 Jahre (Ø 4,5 Std / Tag)



IP54

3000 K

3000K warmweiß



Vernetzbar via Bluetooth



10 - 100% Hauptlicht



Einstellungen via App



Außenleuchte



Betriebsgerät nicht austauschbar



Lichtquelle nicht austauschbar



Plastikfreie Verpackung

Function description

Quality squared. Attractive and robust: the LED L 40 C wall light without sensor with high-quality, square aluminium housing and long-life STEINEL LED system with warm white 3000 K. Featuring soft light start, main light and neighbourhood group function. Conveniently set and network any number of Bluetooth Mesh lights via the app and using the new Bluetooth Mesh standard. Delivered in plastic-free packaging.

Technical specifications

Dimensions (L x W x H)	105 x 201 x 229 mm	Output	12,9 W
With lamp	Yes, STEINEL LED system	Average rated life expectancy of power supply unit at 25°C	> 60000 h
Manufacturer's Warranty	3 years	Photo-cell controller	Yes
Settings via	Smartphone, Tablet, Connect Bluetooth Mesh	Luminous flux total product	987 lm
With remote control	No	Measured luminous flux (360°)	987 lm
Version	without motion detector, with Bluetooth	Colour temperature	3000 K
PU1, EAN	4007841085230	Lamp	LED cannot be replaced
Application, place	Outdoors	Service life LED L70B50 (25°)	> 60000 h
Application, room	outdoors, front door, all round the building, terrace / balcony	Base	without
Colour	Anthracite	LED cooling system	Passive Thermo Control
includes sheet of self-adhesive numbers	No	Soft light start	Yes
Installation site	wall	Continuous light	selectable
Impact resistance	IK03	Main light adjustable	0 - 100 %
IP-rating	IP54	Twilight setting TEACH	Yes
		Interconnection	Yes
		Type of interconnection	Master/master, Master/slave

<https://www.steinell.de>

Subject to technical modifications

04.2024 Page 1 from 3

LED outdoor light without sensor

L 40 C

without motion detector, with Bluetooth
EAN 4007841 085230
Article number 085230



Technical specifications

Protection class	I	Interconnection via	Bluetooth Mesh Connect
Ambient temperature	-20 – 40 °C	Colour Rendering Index CRI	= 82
Housing material	Aluminium		
Cover material	Plastic, opal		
Mains power supply	220 – 240 V / 50 – 60 Hz		

Accessories

EAN 4007841 088620

Wireless pushbutton TapDuo C


LED outdoor light without sensor

L 40 C


without motion detector, with Bluetooth
EAN 4007841 085230
Article number 085230



Dimension Drawing

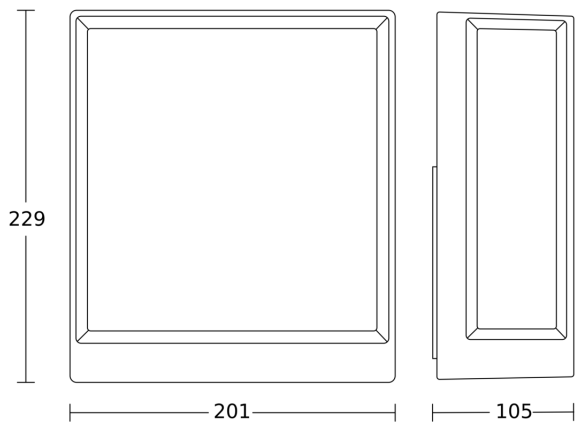

Circuit diagram Bluetooth



Circuit diagram Bluetooth

